

- Stylish and modern widescreen design with "Built for Touch" reliability
- Energy savings using LED technology
- 10 touch projected capacitive (PCAP) touchscreen
- Edge-to-edge glass display with anti-glare for retail interiors
- 3 year standard warranty



\*stand sold separately

## M-Series 1002L 10-inch LED Touch Monitor

The Elo M-Series 1002L widescreen LED touch monitor is a modern and stylish interactive solution for customer engagement at the point of sale. The sleek wide aspect ratio touchscreen features edge-to-edge glass with display area real estate to showcase engaging, memorable, and rewarding content. For environments where space is scarce, the 1002L is ideal as a POS terminal customer-facing display. Built to withstand the rigors of continuous public use, the 1002L is well suited for high use retail venues. The sleek, thin look pairs well with any modern POS system.

The multiple mount and stand options ensure installation flexibility and accommodate tabletop use as well as wall-and pole-mount with standard VESA mount patterns.

Optional color coordinated retail accessories include a Magnetic Stripe Reader (MSR), barcode scanner and Near Field Communication (NFC) adapter for mobile payments and increased compatibility with the latest point of sale applications. The accessories are easily installed, providing an elegant, integrated solution that eliminates the need for external brackets or attachments.

The 1002L is offered with IntelliTouch Pro projected capacitive (PACP) touch technology in a zero-bezel design with ten touch interaction and an anti-glare surface. For applications not requiring interactivity, a non-touch 1002L model is available.



### Key Features:

- Edge-to-edge zero-bezel touchscreen: IntelliTouch® Pro projected capacitive 10-touch
- Antiglare surface treatment
- Modern design with flexible mounting in portrait, landscape and table-top orientation
- Configurable with integrated retail accessories including
  - Magnetic Stripe Reader (MSR),
  - Barcode Scanner
  - NFC for mobile payments
- Power through USB option

### Key Applications:

- POS Terminal Customer-facing Display
- Point-of-Information

### About Elo

40 years ago Elo invented the touchscreen. Today we are re-inventing how you use them to shop, pay, work and play. A global leader with 20+ million retail and hospitality installations in 80+ countries around the world, our products are designed in California and built to last. The Elo touch experience has consistently stood for quality, reliability and innovation. Elo intellectual property is protected by a number of patent, trademark and design registrations globally.

## M-Series 1002L 10-inch LED Touch Monitor

| Key Specifications                    |   |
|---------------------------------------|---|
| Model                                 | 1002L   |
| Color                                 | Black   |
| Active display area                   | Horizontal: 8.57" (218mm); Vertical 5.37" (136.6mm)   |
| Monitor dimensions                    | Width: 10.02" (254.6mm); Height: 6.98" (177.3mm); Depth: 1.14" (29mm)   |
| LCD technology                        | Active matrix TFT LCD with LED backlighting   |
| Diagonal Size                         | 10.1"   |
| Aspect ratio                          | 16:10   |
| Number of touches                     | 10 touch points   |
| Native (Optimal) Resolution           | 1280 x 800  |
| Other Supported Resolutions           | 640x480 60Hz, 800x600 60Hz, 1024x768 60Hz, 1280x800 60Hz  |
| Colors                                | 262,000   |
| Brightness (typical)                  | LCD Panel: 350 nits; with IntelliTouch Pro PCAP, DC power: 315 nits; IntelliTouch Pro, USB power: 176 nits  |
| Response Time – Total (typical)       | 25ms  |
| Viewing Angle (typical)               | Horizontal: +/-85° or 170° total; Vertical: +/-85° or 170° total  |
| Contrast Ratio (typical)              | 700:1   |
| Video                                 | Mini-VGA (Mini-VGA to VGA DE-15 Male connector cable included); HDMI (HDMI cable included)<br>Input Video Horizontal Sync frequency range: 31.5 – 60KHz; Input Video Vertical Sync (frame rate) frequency range: 60Hz   |
| Power                                 | Monitor input power connector: Coaxial power jack (2.5 mm pin outer diameter, 6.4mm barrel inner diameter); Monitor input power signal specifications: 12VDC +/- 5%; Adapter input voltage range: 100-240VAC, 50/60Hz; Power Consumption (Typical): ON (monitor + AC/DC adapter): 5.6W; SLEEP (monitor + AC/DC adapter): 0.4W; OFF (monitor + AC/DC adapter): 0.2W; Max Power Consumption with USB Power : 7W                     |
| Speakers                              | 2 x 2W internal speakers  |
| Weight                                | Unpackaged: 1.75 lbs / 800 g; Packaged: 4.5 lbs / 2kg   |
| Shipping box dimensions (W x D x H)   | 12.2" (310mm) x 9.37" (238mm) x 5.47" (139mm)   |
| On-Screen Display (OSD)               | Accessible through switches along the bottom. Controls: Menu, Power, Up, Down, Select<br>Settings: Brightness, Contrast, Clock, Phase, H-position, V-position, Auto-Adjust, Aspect Ratio, Sharpness, Color Temperature, OSD Timeout, OSD Language, Volume, Mute, Recall Defaults, Audio Select<br>Languages: English, French, Italian, German, Spanish, Simplified Chinese, Traditional Chinese, Japanese<br>Lockouts: OSD, Power |
| Mounting Options                      | VESA 4-hole 75mm mounting interface on rear of unit;<br>Optional tabletop and pole mount stands available for purchase  |
| Temperature                           | Operating: 0 °C to 40 °C /32 °F to 104 °F; Storage: -20 °C to 60 °C /-4 °F to 140 °F  |
| Humidity (non-condensing)             | Operating: 20%-80%; Storage: 10%-95%  |
| Regulatory approvals and declarations | Canada cUL, IC; Europe CE; Japan VCCI; United States UL, FCC  |
| Warranty                              | 3 years standard, up to 2 year extension available  |
| MTBF                                  | 50,000 hours demonstrated   |

## Ordering Information

| Model | Part #  | Technology            | Interface | Surface Treatment | Color |
|-------|---------|-----------------------|-----------|-------------------|-------|
| 1002L | E045337 | IntelliTouch Pro PCAP | USB       | Antiglare         | Black |
|       | E138394 | Non-touch             | USB       | Antiglare         | Black |

## Optional Peripherals

| Peripheral             | Part #  |
|------------------------|---------|
| Magnetic Stripe Reader | E001002 |
| NFC Reader             | E001004 |
| Barcode Reader         | E093433 |
| VFD Customer Display   | E001003 |

| Peripheral           | Part #  |
|----------------------|---------|
| Pole Mount – 6 inch  | E047458 |
| Pole Mount – 12 inch | E047663 |
| Pole Mount – 18 inch | E047864 |
| Floor Stand – 5 foot | E048069 |

| Peripheral                           | Part #  |
|--------------------------------------|---------|
| Shelf Mount Bracket                  | E043382 |
| Pole Mount Bracket                   | E045151 |
| Rear Facing Customer Display Bracket | E332358 |
| Table-top Stand                      | E160104 |

To find out more about our extensive range of Elo touch solutions, go to [www.elotouch.com](http://www.elotouch.com), or call the office nearest you.

### North America

Elo Touch Solutions  
1033 McCarthy Boulevard  
Milpitas, CA 95035

800-ELO-TOUCH

Tel +1 408 597 8000

Fax +1 408 597 8001

customerservice@elotouch.com

### Europe

Tel +32 (0)16 70 45 00

Fax +32 (0)16 70 45 49

elosales@elotouch.com

### Asia-Pacific

Tel +86 (21) 3329 1385

Fax +86 (21) 3329 1400

www.elotouch.com.cn

### Latin America

Tel 786-923-0251

Fax 305-931-0124

www.elotouch.com

Elo Touch Solutions, Inc. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Elo (logo) and Elo Touch Solutions are trademarks of Elo Touch Solutions, Inc. Copyright 2015 Elo Touch Solutions, Inc. All rights reserved. DS000114, rev B 08/15



- Stylish and modern widescreen design with “Built for Touch” reliability
- Energy savings using LED technology
- 10 touch projected capacitive (PCAP) touchscreen
- Edge-to-edge glass with anti-glare for retail interiors
- 3 year warranty



## M-Series 1502L 15-inch LED Touch Monitor

The Elo M-Series 1502L widescreen LED touch monitor is a modern and stylish interactive solution for customer engagement and employee effectiveness at the point of sale. The sleek wide aspect ratio touchscreen features full HD edge-to-edge glass with display area real estate to showcase engaging, memorable and rewarding content. An HD display model is available for transactional and other applications not requiring full HD 1920x1080 resolution. For environments where space is scarce, the 1502L is an ideal widescreen POS terminal monitor or stylish customer-facing interactive information display. Built to withstand the rigors of continuous public use, the 1502L is well suited for high use retail venues. The sleek, thin look pairs well with any modern store environment.

The multiple mount and stand options ensure installation flexibility and accommodate desktop use as well as wall- and pole-mount with standard VESA mount patterns.


Optional color coordinated retail accessories include a Magnetic Stripe Reader (MSR), barcode scanner and Near Field Communication (NFC) adapter for mobile payments and increased compatibility with the latest point of sale applications. The accessories are easily installed, providing an elegant, integrated solution that eliminates the need for external brackets or attachments.

The 1502L is offered with IntelliTouch Pro projected capacitive (PCAP) touch technology in a zero-bezel design with ten touch interaction and an anti-glare surface.

### Optional Peripherals

| Peripheral             | Part #  |
|------------------------|---------|
| Magnetic Stripe Reader | E001002 |
| NFC Reader             | E001004 |
| Barcode Reader         | E093433 |
| VFD Customer Display   | E001003 |
| Pole Mount – 6 inch    | E047458 |

| Peripheral           | Part #  |
|----------------------|---------|
| Pole Mount – 12 inch | E047663 |
| Pole Mount – 18 inch | E047864 |
| Floor Stand – 5 foot | E048069 |
| Wall Mount           | E143088 |

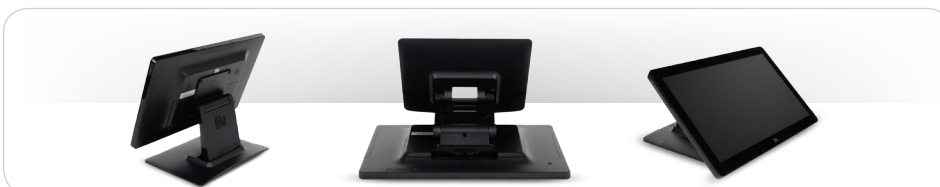

### Key Features:

- Edge-to-edge zero-bezel touchscreen: IntelliTouch® Pro projected capacitive 10-touch
- Antiglare surface treatment
- Full HD or HD resolution models
- Modern design with flexible mounting in portrait, landscape and table-top orientation
- Configurable with integrated retail accessories including
  - Magnetic Stripe Reader (MSR),
  - Barcode Scanner
  - NFC for mobile payments

### Key Applications:

- Point of Service
- Point of Sale
- POS Terminal Customer-facing Display
- Point-of-Information

### About Elo

40 years ago Elo invented the touchscreen. Today we are re-inventing how you use them to shop, pay, work and play. A global leader with 20+ million retail and hospitality installations in 80+ countries around the world, our products are designed in California and built to last. The Elo touch experience has consistently stood for quality, reliability and innovation. Elo intellectual property is protected by a number of patent, trademark and design registrations globally.

## M-Series1502L 15-inch LED Touch Monitor

| Key Specifications                    |   |
|---------------------------------------|---|
| Model                                 | 1502L   |
| Color                                 | Black   |
| Active display area                   | Horizontal: 10.06" (345.2mm); Vertical 7.66" (194.6mm)  |
| Monitor dimensions                    | Width: 15.24" (387mm); Height: 9.62" (244.4mm); Depth: 1.29" (32.9mm)   |
| LCD technology                        | Active matrix TFT LCD with LED backlighting   |
| Diagonal Size                         | 15.6"   |
| Aspect ratio                          | 16:9  |
| Number of touches                     | 10 touch points   |
| Native (Optimal) Resolution           | Full HD model: 1920 x 1080; HD (WXGA) model: 1366 x 768   |
| Other Supported Resolutions           | Full HD model: 640x480 60Hz; 720x576 50Hz; 800x600 56, 60Hz; 1024x768 60Hz; 1280x720 50, 60Hz; 1280x800 at 60, 60RB Hz; 1280x960 60Hz; 1280x1024 60Hz; 1360x768 at 60Hz; 1366x768 60Hz, 60Hz RB; 1440x900 60Hz, 60Hz RB; 1680x1050 60Hz, 60Hz RB; 1920x1080 50, 60Hz<br>HD model: 640x480 60Hz; 720x576 50Hz; 800x600 56, 60Hz; 1024x768 60Hz; 1280x720 50, 60Hz; 1280x800 at 60, 60RB Hz; 1280x960 60Hz; 1280x1024 60Hz; 1360x768 60Hz; 1366x768 60Hz, 60Hz RB |
| Colors                                | 262,000   |
| Brightness (typical)                  | Full HD model: LCD Panel: 300 nits; with IntelliTouch Pro PCAP: 270 nits<br>HD model: LCD Panel: 220 nits; with IntelliTouch Pro PCAP: 187 nits   |
| Response Time – Total (typical)       | Full HD model: 35 ms; HD model: 10 ms   |
| Viewing Angle (typical)               | Full HD model: Horizontal: +/-80° or 160° total; Vertical: +/-80° or 160° total<br>HD model: Horizontal: 90° total; Vertical: 65° total   |
| Contrast Ratio (typical)              | Full HD model: 700:1; HD model: 600:1   |
| Video                                 | Mini-VGA (Mini-VGA to VGA DE-15 Male connector cable included); HDMI (HDMI cable included)<br>Input Video Horizontal Sync frequency range: 31.5 – 60KHz<br>Input Video Vertical Sync (frame rate) frequency range: 60Hz   |
| Power                                 | Monitor input power connector: Coaxial power jack (2.5 mm pin outer diameter, 6.4mm barrel inner diameter); Monitor input power signal specifications: 12VDC +/- 5%; Adapter input voltage range: 100-240VAC, 50/60Hz; Power Consumption (Typical): ON (monitor + AC/DC adapter): Full HD model : 8.7W; HD model: 10.2W; SLEEP (monitor + AC/DC adapter): 0.3W; OFF (monitor + AC/DC adapter): 0.2W   |
| Speakers                              | 2 x 2W internal speakers  |
| Weight                                | Unpackaged with stand: 6.72 lbs / 3.05 kg; Unpackaged without stand: 6.64 lbs / 3.0 kg<br>Packaged: 11.2 lbs / 5.08 kg  |
| Shipping box dimensions (W x D x H)   | 18" (457mm) x 13.7" (347mm) x 7.13" (181mm)   |
| On-Screen Display (OSD)               | Accessible through switches along the bottom. Controls: Menu, Power, Up, Down, Select<br>Settings: Brightness, Contrast, Clock, Phase, H-position, V-position, Auto-Adjust, Aspect Ratio, Sharpness, Color Temperature, OSD Timeout, OSD Language, Volume, Mute, Recall Defaults, Audio Select<br>Languages: English, French, Italian, German, Spanish, Simplified Chinese, Traditional Chinese, Japanese<br>Lockouts: OSD, Power                               |
| Mounting Options                      | VESA 4-hole 75mm and 100mm mounting interface on rear of unit<br>Optional tabletop stand available for purchase (P/N E044162)   |
| Temperature                           | Operating: 0 °C to 40 °C /32 °F to 104 °F; Storage: -20 °C to 60 °C /-4 °F to 140 °F  |
| Humidity (non-condensing)             | Operating: 20%-80%; Storage: 10%-95%  |
| Regulatory approvals and declarations | Canada cUL, IC; Europe CE; Japan VCCI; United States UL, FCC  |
| Warranty                              | 3 years standard, up to 2 year extension available  |
| MTBF                                  | 50,000 hours demonstrated   |

## Ordering Information

| Model | Part #  | Technology            | Interface | Surface Treatment | Display              | Color |
|-------|---------|-----------------------|-----------|-------------------|----------------------|-------|
| 1502L | E045538 | IntelliTouch Pro PCAP | USB       | Antiglare         | Full HD<br>1920x1080 | Black |
|       | E318746 | IntelliTouch Pro PCAP | USB       | Antiglare         | HD<br>1366x768       | Black |

To find out more about our extensive range of Elo touch solutions, go to [www.elotouch.com](http://www.elotouch.com), or call the office nearest you.

### North America

Elo Touch Solutions  
1033 McCarthy Boulevard  
Milpitas, CA 95035

### 800-ELO-TOUCH

Tel +1 408 597 8000  
Fax +1 408 597 8001  
customerservice@elotouch.com

### Europe

Tel +32 (0)16 70 45 00  
Fax +32 (0)16 70 45 49  
elosales@elotouch.com

### Asia-Pacific

Tel +86 (21) 3329 1385  
Fax +86 (21) 3329 1400  
www.elotouch.com.cn

### Latin America

Tel 786-923-0251  
Fax 305-931-0124  
www.elotouch.com

Elo Touch Solutions, Inc. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Elo (logo) and Elo Touch Solutions are trademarks of Elo Touch Solutions, Inc. Copyright 2015 Elo Touch Solutions, Inc. All rights reserved. DS000113, rev A 07/15

